
Panasonic ideas for life

KV-S3105C Colour KV-S3085

the Reliable **CHOICE** for imaging excellence



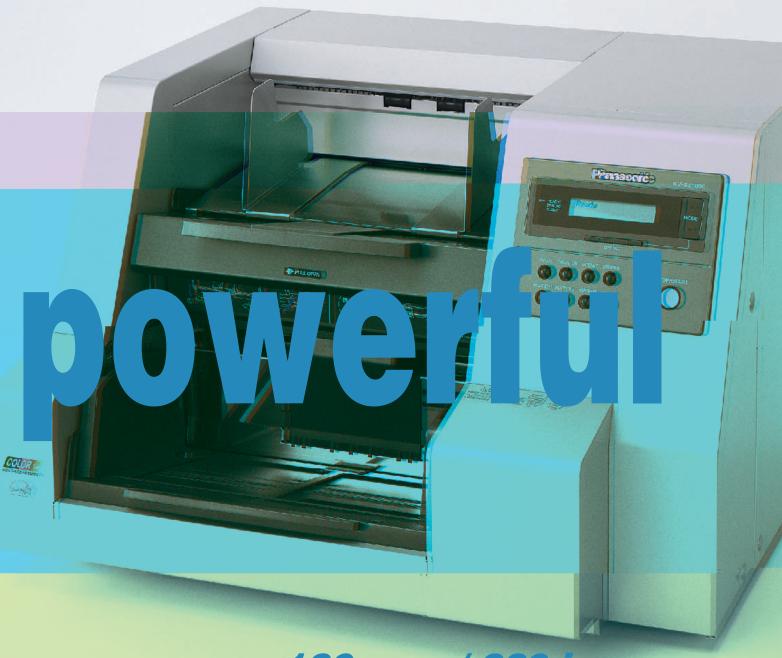

130 ppm / 220 ipm (KV-S3105C) 100 ppm / 180 ipm (KV-S3085)

(A4 Landscape 200 dpi Binary)

- New advanced Image Enhancement Technology
- High-Volume 1,000-page ADF (Business Card to A3 size)
- Reliable Ultrasonic Double Feed Detection
- USB 2.0 and Ultra Wide SCSI Dual Interface

















The KV-S3105C/KV-S3085 has advanced image enhancement technology, which optimizes scanner performance and can produce digital image quality that may be superior to the original document itself, by utilizing features such as those described below and many others.

Colour features are available on KV-S3085 when the Colour upgrade kit is installed.

Automatic Binary / Colour Distinction

Automatic Binary / Colour distinction allows the scanner to recognize and differentiate Colour and Black & White pages. This function reduces scan-to-file size while promoting a more efficient scanning process.

MultiStream function

The MultiStream® function enables a single scan to be saved as two separate formats simultaneously. For example the document will be saved in Binary for OCR and archival purposes and saved as a full colour image for short term on-screen retrieval.

Multi colour Drop Out function

Up to 3 distinct colour ranges can be selected to be dropped out of the scanned image. This function, when used in forms processing applications, can greatly improve OCR performance and accuracy, resulting in increased productivity and potential cost savings.

Automatic De-Skew and Cropping

These useful features take the worry out of scanning mixed size originals. Should documents skew as they are being fed, the Automatic De-Skew feature can straighten them out. And scanned documents can be automatically cropped to their original size, reducing pre-scan production time, thereby increasing efficiency and reducing costs.



With its easy to use "clam-shell" design and stainless steel construction, the KV-S3105C/KV-S3085 is built to last while providing easy access for routine cleaning and maintenance. It's no wonder that the KV-S3105C/KV-S3085 Series has an unlimited daily duty cycle.



Designed to increase productivity and reduce downtime, the KV-S3105C/KV-S3085 incorporates longer lasting, easy to replace rollers. No more waiting for a service technician to perform routine roller replacements - these rollers can replaced quickly without any tools.



With the standard USB 2.0 and Ultra Wide SCSI interface the KV-S3105C/KV-S3085 Series can be connected to any PC depending on your office environment.
























Specifications

			KV-S3105C	KV-S3085
Scanning face			Duplex, Sheet Feed Scanning	
Scanning Method			3-Line CCD image sensor	
Jeanning i			Selectable black and whi	
Scanning S A4 size, land		ary 200 dpi	Up to 130 ppm / 220 ipm	Up to 100 ppm / 180 ipm
A4 SIZE, tulli	Co	our 200 dpi	Up to 130 ppm / 175 ipm	Up to 100 ppm / 165 ipm *Requires optional Colour Upgrade Kit
Resolution (Colour and B/W)		B/W)	100 - 600 dpi (1 dpi step)	
Detection			Ultrasonic double-feed detection	
		ary	MH, MR, MMR	
Image Com	· —	yscale	JPEG	
	Со	lour	JPEG (KV-S3085 requires the optional Colour Upgrade Kit)	
Image Output			Binary (simple binary, Halftone mode), Grayscale (8-bit), Colour (24-bit)*: sRGB, ICM (TWAIN), MultiStream® output *KV-S3085 requires optional Colour Upgrade Kit	
Binary Mode Halftone			Dither, Error diffusion	
Image Control Executed by driver software or Panasonic RTIV™			Image Emphasis (5 steps), Gamma correction, Dynamic Threshold, Automatic Separation, Noise Reduction, Shadow Removal, Automatic De-skewing, Automatic Cropping, Mirror Image, Monochrome Reversing, Automatic Binary / Colou Distinction, Automatic Multi Colour Dropout and much more	
Other functions			Length Control, Document size detection, Double feed detection, Barcode detection (ISIS), Patch code detection, Separation sheet, Control sheet	
Paper	Size (ADF)	Minimum	48 mm width x 70 mm length	
	Size (ADI)	Maximum	297 mm width x 432 mm length	
	Weight	Single	30 ~ 157 g/m²	
	Weight	Continuous	50 ~ 157 g/m²	
	Thickness	Single	0.04 ~ 0.2 mm	
		Continuous	0.06 ~ 0.2 mm	
Automatic Document Feeder		eder	Up to 1,000 sheets (64 g/m²)	
Long Paper Mode Image Memory Standard Maximum Interface			Up to 84.0 m (A3 size, 200 dpi, KV-S3085 requires additional memory	
			256 MB	64 MB
		Maximum	Base memory plus 256 MB or 512 MB High-Speed USB 2.0 / Ultra Wide SCSI (SCSI III) - 40 MB/se	
Power Requirement			AC 220 - 240 V, 50/60 Hz AC 100 - 120 V, 50/60 Hz	
Power Consumption		Scanning	1.5 A (200 - 240 V), 3.0 A (100 - 120 V)	
		Standby	0.5 A (200 - 240 V), 0.7 A (100 - 120 V)	
		Sleep	11 W (200 - 240 V), 10 W (100 - 120 V)	
Operating Environment - Storage Environment -		Temperature		
		Humidity	20% RH to 80% RH	
		Temperature		
		Humidity	10% RH to 80% RH	
External Dimensions			627 mm (W) x 546 mm (D) x 415 mm (H)	
Weight			Approx. 52 Kg	
Accessories			CD ROM: Operation instructions, Installation manual, Maintenance manual, RTIV™ manual, PIE manual, RTIV™ software, ISIS® / TWAIN driver software, Multi Colour Dropout Utility, Power cord, USB cable & Blower Shading Paper, Cleaning paper, Warranty card	
Options	Roller exchange kit		KV-SS026	
	Roller exchange kit (Thin Paper)			
	Roller cleaning paper		KV-SS03	
	Imprinter unit (Post)		KV-SS028	
	Colour upgrade kit		KV-SS029 (For KV-S3085)	
	Ink cartridge		KV-SS021	



Imprinter unit (Post)



Roller exchange kit

As an ENERGY STAR® Partner, Panasonic has determined that this product meets the ENERGY STAR® Guidelines for energy efficiency. (ENERGY STAR® and the ENERGY STAR® certification marks are registered US marks.) RTIV™ are trademarks of Matsushita Electric Industrial Co., Ltd. MultiStream®, ISIS® and ISIS-Certified™ are trademarks of Pixel translations, a division of Captiva Software Corporation. All other brand or product names are the property of their respective holders. Design and specifications are subject to change without notice.



